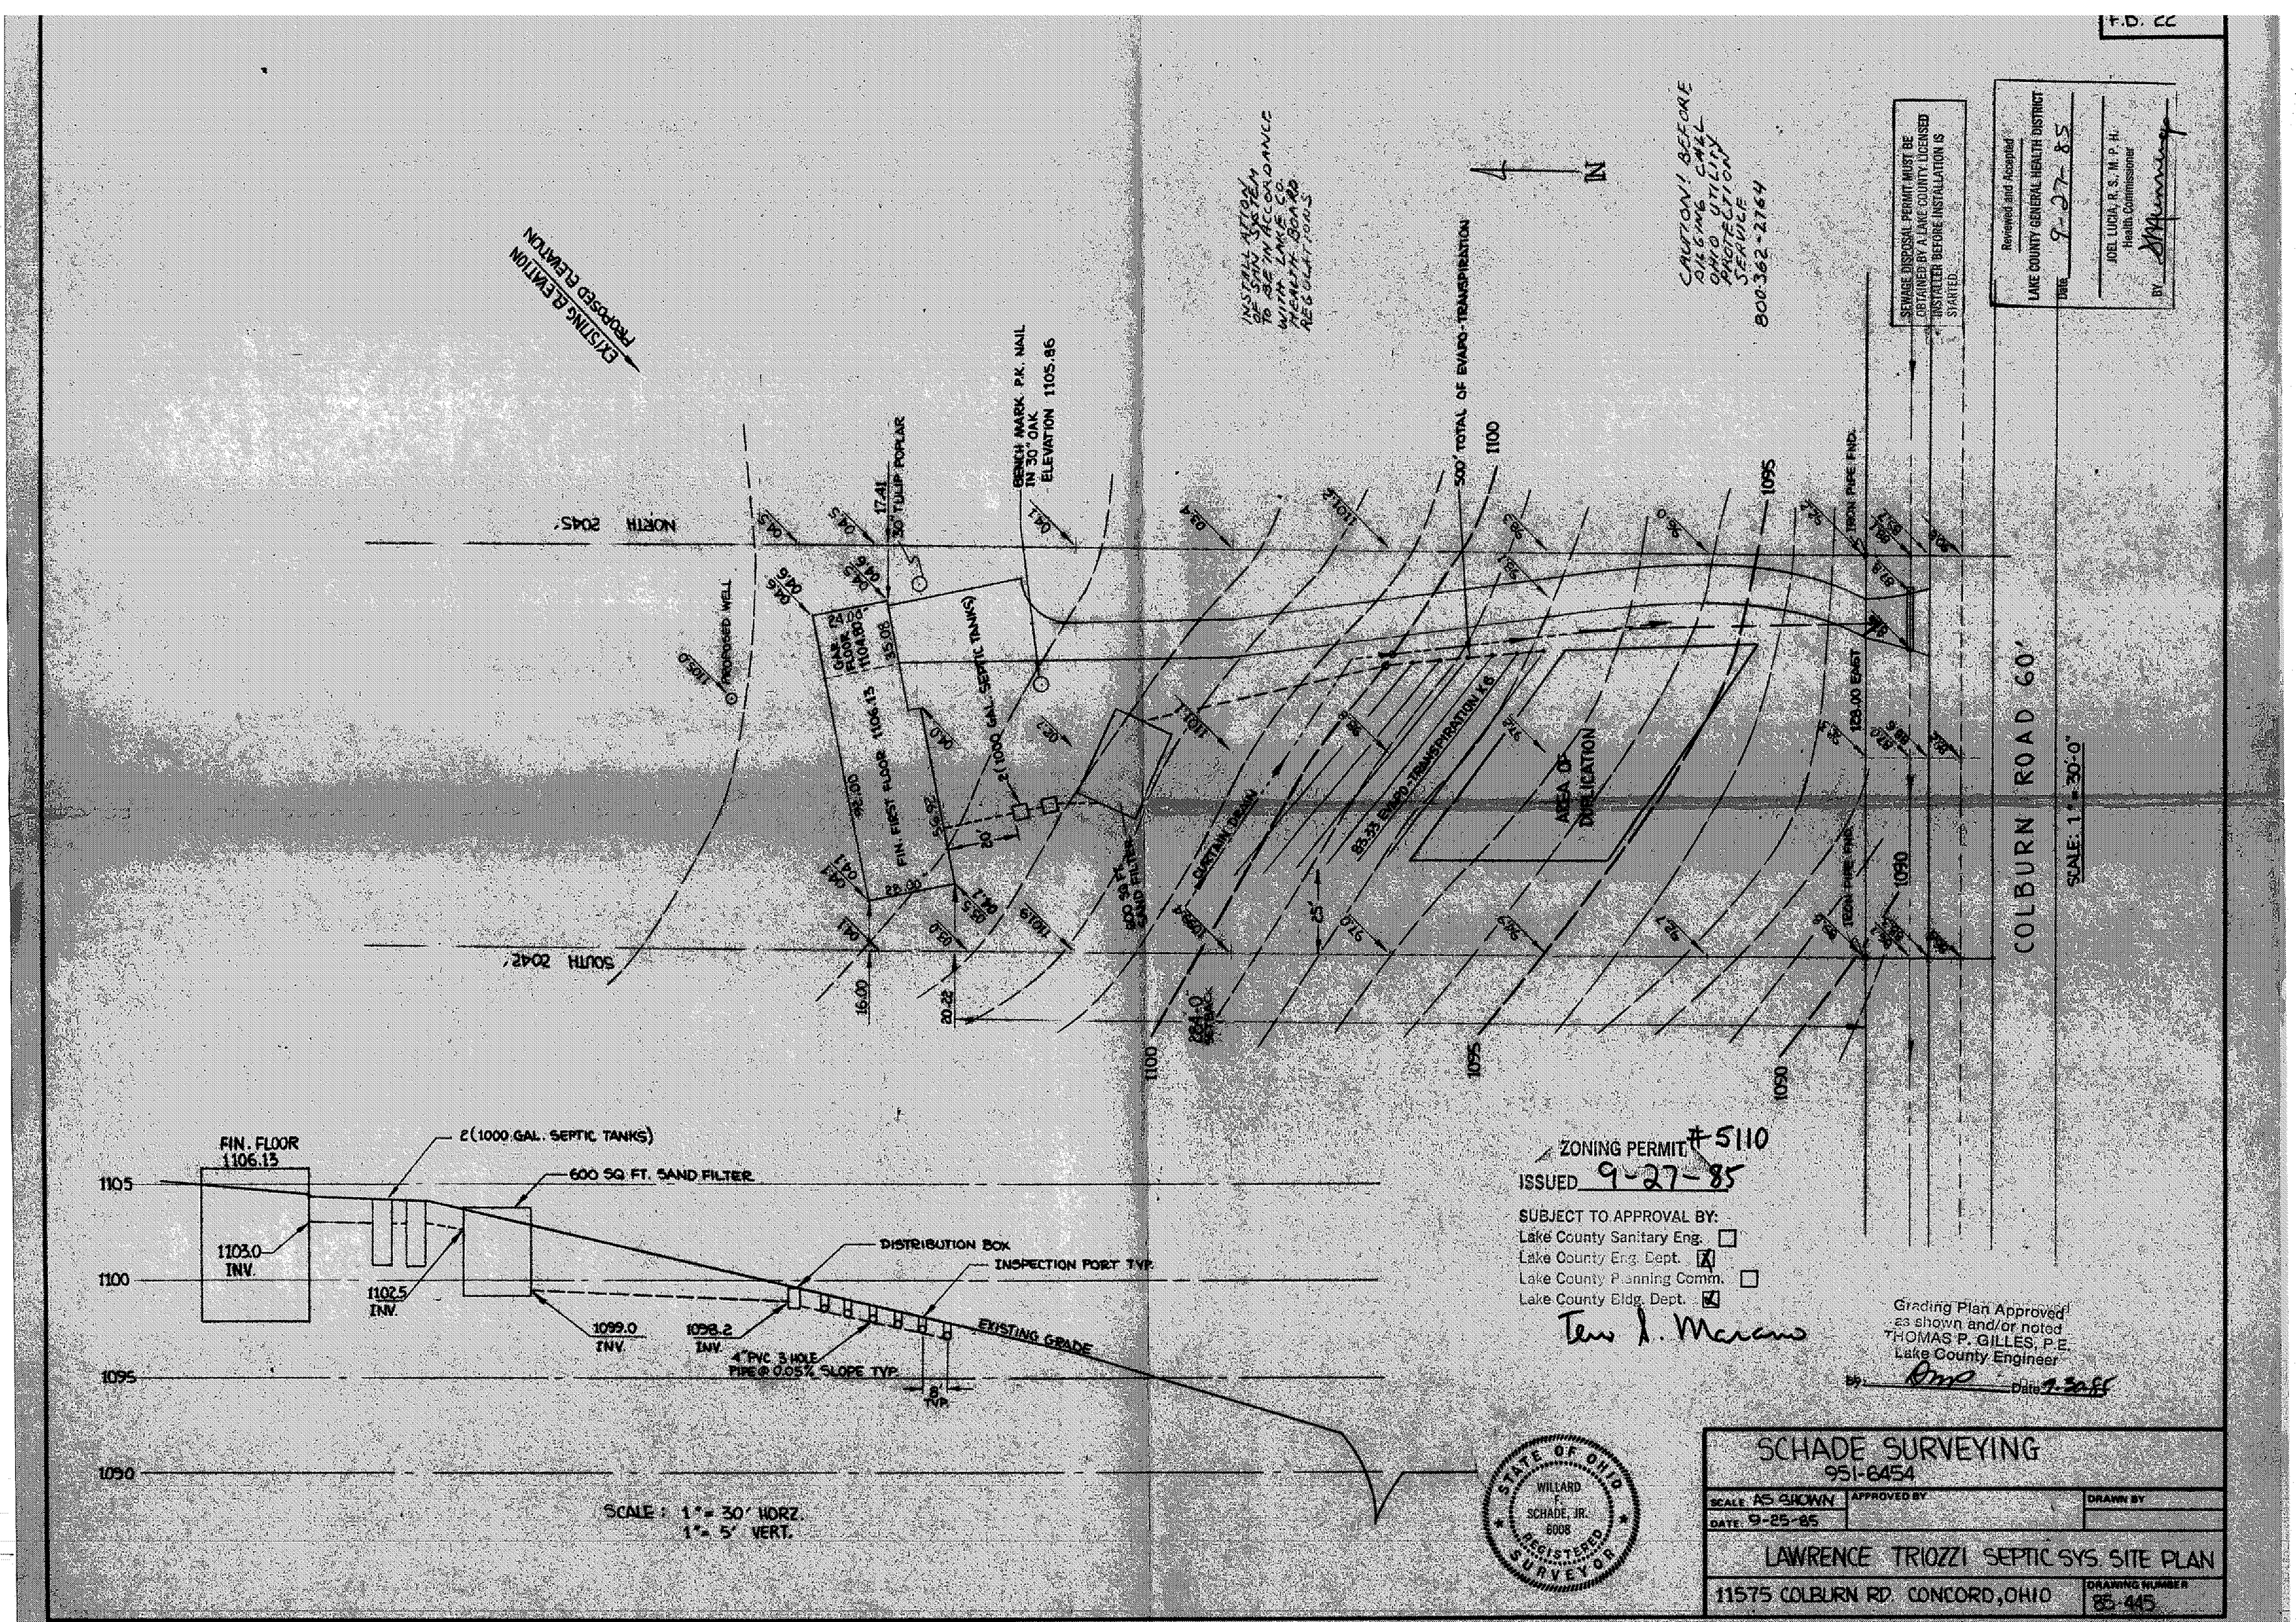

F.B. 22
EXISTING ELEVATION
PROPOSED ELEVATION
NORTH 2045'
SOUTH 2042'
PROPOSED WELL
17.41
30" TULIP POPLAR
BENCH MARK P.K. NAIL IN 30" OAK ELEVATION 1105.86
2(1000 GAL. SEPTIC TANKS)
FIN. FIRST FLOOR 1106.13
GAR. FLOOR 1104.80
600 SQ FT. SAND FILTER
CURTAIN DRAIN
500' TOTAL OF EVAPO-TRANSPIRATION
83.33 EVAPO-TRANSPIRATION X6
AREA OF DUPLICATION
128.00 EAST
IRON PIPE FND.
INSTALLATION OF SAN SYSTEM TO BE IN ACCORDANCE WITH LAKE CO. HEALTH BOARD REGULATIONS
CAUTION! BEFORE DIGGING CALL OHIO UTILITY PROTECTION SERVICE 800-362-2764
N
COLBURN ROAD 60'
SCALE: 1" = 30'-0"
SEWAGE DISPOSAL PERMIT MUST BE OBTAINED BY A LAKE COUNTY LICENSED INSTALLER BEFORE INSTALLATION IS STARTED.
Reviewed and Accepted
LAKE COUNTY GENERAL HEALTH DISTRICT
Date 9-27-85
JOEL LUCIA, R.S., M.P.H.
Health Commissioner
BY
FIN. FLOOR 1106.13
2(1000 GAL. SEPTIC TANKS)
600 SQ FT. SAND FILTER
1103.0 INV.
1102.5 INV.
1099.0 INV.
1098.2 INV.
DISTRIBUTION BOX
INSPECTION PORT TYP.
EXISTING GRADE
4" PVC 3 HOLE PIPE @ 0.05% SLOPE TYP.
8' TYP.
1105
1100
1095
1090
SCALE: 1" = 30' HORZ.
1" = 5' VERT.
ZONING PERMIT #5110
ISSUED 9-27-85
SUBJECT TO APPROVAL BY:
Lake County Sanitary Eng. ☐
Lake County Eng. Dept. ☒
Lake County Planning Comm. ☐
Lake County Bldg. Dept. ☒
Grading Plan Approved as shown and/or noted
THOMAS P. GILLES, P.E.
Lake County Engineer
By: Date 9-30-85
STATE OF OHIO
WILLARD F. SCHADE, JR.
6008
REGISTERED SURVEYOR
SCHADE SURVEYING
951-6454
SCALE AS SHOWN
DATE 9-25-85
APPROVED BY
DRAWN BY
LAWRENCE TRIOZZI SEPTIC SYS. SITE PLAN
11575 COLBURN RD. CONCORD, OHIO
DRAWING NUMBER 85-445