


NOTE: ALL IRON PINS SET ARE
5/8" X 30" AND ARE CAPPED
BABCOCK JONES & ASSOC.

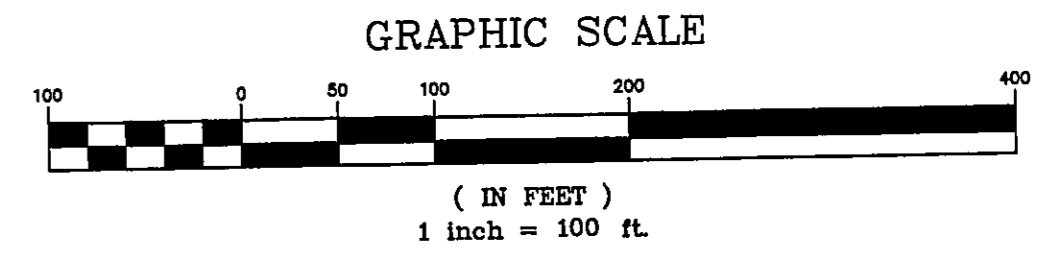

CURVE TABLE					
CURVE	LENGTH	RADIUS	TANGENT CHORD	BEARING	DELTA
C1	58.40	35.00	28.43	S41°10'3"E	92°19'40"
C2	178.04	450.00	89.18	N08°20'40"W	22°24'52"
C3	88.42	670.00	43.27	N03°40'53"E	07°23'25"

BEARINGS ARE BASED UPON THE CENTERLINE OF EUCLID CHARDON ROAD BEING NORTH 87°27'53" WEST AND ARE USED TO DESCRIBE ANGLES ONLY.

REV. NO.	DESCRIPTION	DATE	BY	CHK'D
1	REVISED SNYDERS NORTH PROPERTY LINE	1/9/04	B.P.	H.J.
2	REVISED PLAT	2/9/04	N.S.	H.J.
3	REVISED PLAT	2/11/04	B.P.	H.J.
4	REVISED PLAT	2/25/04	B.P.	H.J.
5	REVISED PLAT	3/1/04	H.J.	H.J.

bj BABCOCK, JONES AND ASSOCIATES, INC
 CIVIL ENGINEERS - SURVEYORS - LAND PLANNERS
 PAINESVILLE OHIO 44077

DATE	JANUARY 2004
DESIGN BY	H.J.
DRAWN BY	B.P.
APPROVED BY	H.J.
CREW CHIEF	W.B.

PLAT OF SURVEY
 FOR
 THE RESERVE AT STONE CREEK SUBDIVISION
 STONE CREEK LAND COMPANY, LLC

CITY OF KIRTLAND LAKE COUNTY STATE OF OHIO

SCALE	1"=100'
JOB NO	03-057
SHEET	1 / 1

Harry Jones #6343
DATE

