CONSTRUCTION NOTES

ALL CONSTRUCTION SHALL CONFORM TO THE LAKE COUNTY BOARD OF HEALTH AND THE LAKE COUNTY BUILDING DEPARTMENT REGULATIONS.

DRAINAGE IMPROVEMENTS OR CHANGES FROM EXISTING GRADE NOTED ON THE APPROVED PLAN SHALL BE INSTALLED PRIOR TO SEWAGE DISPOSAL SYSTEM CONSTRUCTION.

RESIDENCE MUST UTILIZE WATER SAVING TOILETS, SHOWERHEADS AND FAUCETS.

NO OPEN BURNING WILL OCCUR DURING CONSTRUCTION.

ROOF WATER, FOUNDATION DRAINAGE, CISTERN OVERFLOW, SURFACE DRAINAGE OR SUBSURFACE DRAINAGE SHALL NOT BE DISCHARGED INTO A BUILDING SEWER OR INTO A HOUSEHOLD SEWAGE DISPOSAL SYSTEM.

AERATION-TYPE TREATMENT SYSTEM SHALL CONFORM TO SECTION 840 OF THE LAKE COUNTY BOARD OF HEALTH REGULATIONS.

SEWAGE LIFT PUMP SHALL BE CAPABLE OF LIFTING RESIDENTIAL SEWAGE EFFLUENT AT A RATE OF 70 GPM AT 10.0 GPM OF HEAD.

IF A SEPARATE PUMPING CHAMBER IS UTILIZED, THE CHAMBER SHALL HAVE A MINIMUM WORKING VOLUME OF 250 GALLONS. THE FLOAT LEVELS SHALL BE ADJUSTED TO PROVIDE FOR A 150 GALLON DOSING VOLUME TO THE DISPOSAL FIELD.

ELECTRICAL WORK AND EQUIPMENT SHALL CONFORM TO THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE.

MECHANICAL COMPONENTS SHALL BE INSTALLED IN A PROPERLY VENTED LOCATION AND ALL VENTS, AIR INTAKES AND AIR HOSES SHALL BE PROTECTED FROM SNOW, ICE OR WATER VAPOR ACCUMULATIONS. INSTALLATION SHALL BE MADE TO MINIMIZE RELEASE OF ODORS.

MECHANICAL COMPONENTS INSTALLED IN OR AT THE SEWAGE TANK SHALL BE PROTECTED AGAINST DAMAGE OR IMPAIRMENT OF EFFICIENCY BY FLOODING, FOAMING OR SURCHARGING. PUMPS MUST BE READILY REMOVABLE FROM THE MANHOLE IN CASE OF PUMP FAILURE.

CONTROL AND ALARM CIRCUITS FOR AERATION SYSTEM AND LIFT PUMP SHALL BE WIRED TO A COMMON ANNUNCIATOR TO BE LOCATED IN THE BASEMENT OR GARAGE OF THE RESIDENCE.

EACH SECTION OF THE LEACHING LINE SHALL BE PROVIDED WITH NOT LESS THAN ONE INSPECTION PORT. THE MINIMUM DIMENSION OF WHICH SHALL BE FOUR (4") INCHES.

THE DISTRIBUTION BOX, SPLITTER BOX AND INSPECTION PORTS SHALL BE BROUGHT TO GRADE AND SHALL BE PROVIDED WITH SECURED COVERS. THE MINIMUM INSIDE DIMENSION OF THE BOX SHALL BE EIGHTEEN (18") INCHES IN WIDTH. THE BOX SHALL BE OF SUFFICIENT DEPTH TO PREVENT OVERFLOWING WHEN SURGED.

SURFACE WATER SHALL BE DIVERTED AWAY FROM THE DISPOSAL FIELD AREAS BY THE USE OF SWALES. CURTAIN DRAINS SHALL BE INSTALLED AS INDICATED ON THE PLAN.

EVAPORATION-TRANSPIRATION TRENCHES SHALL BE COVERED WITH TOPSOIL AND SEEDED. SHRUBBERY SHALL BE PLANTED IN THE AREA OF THE FIELD IN A FASHION TO BEST ASSIST IN TRANSPIRATION.

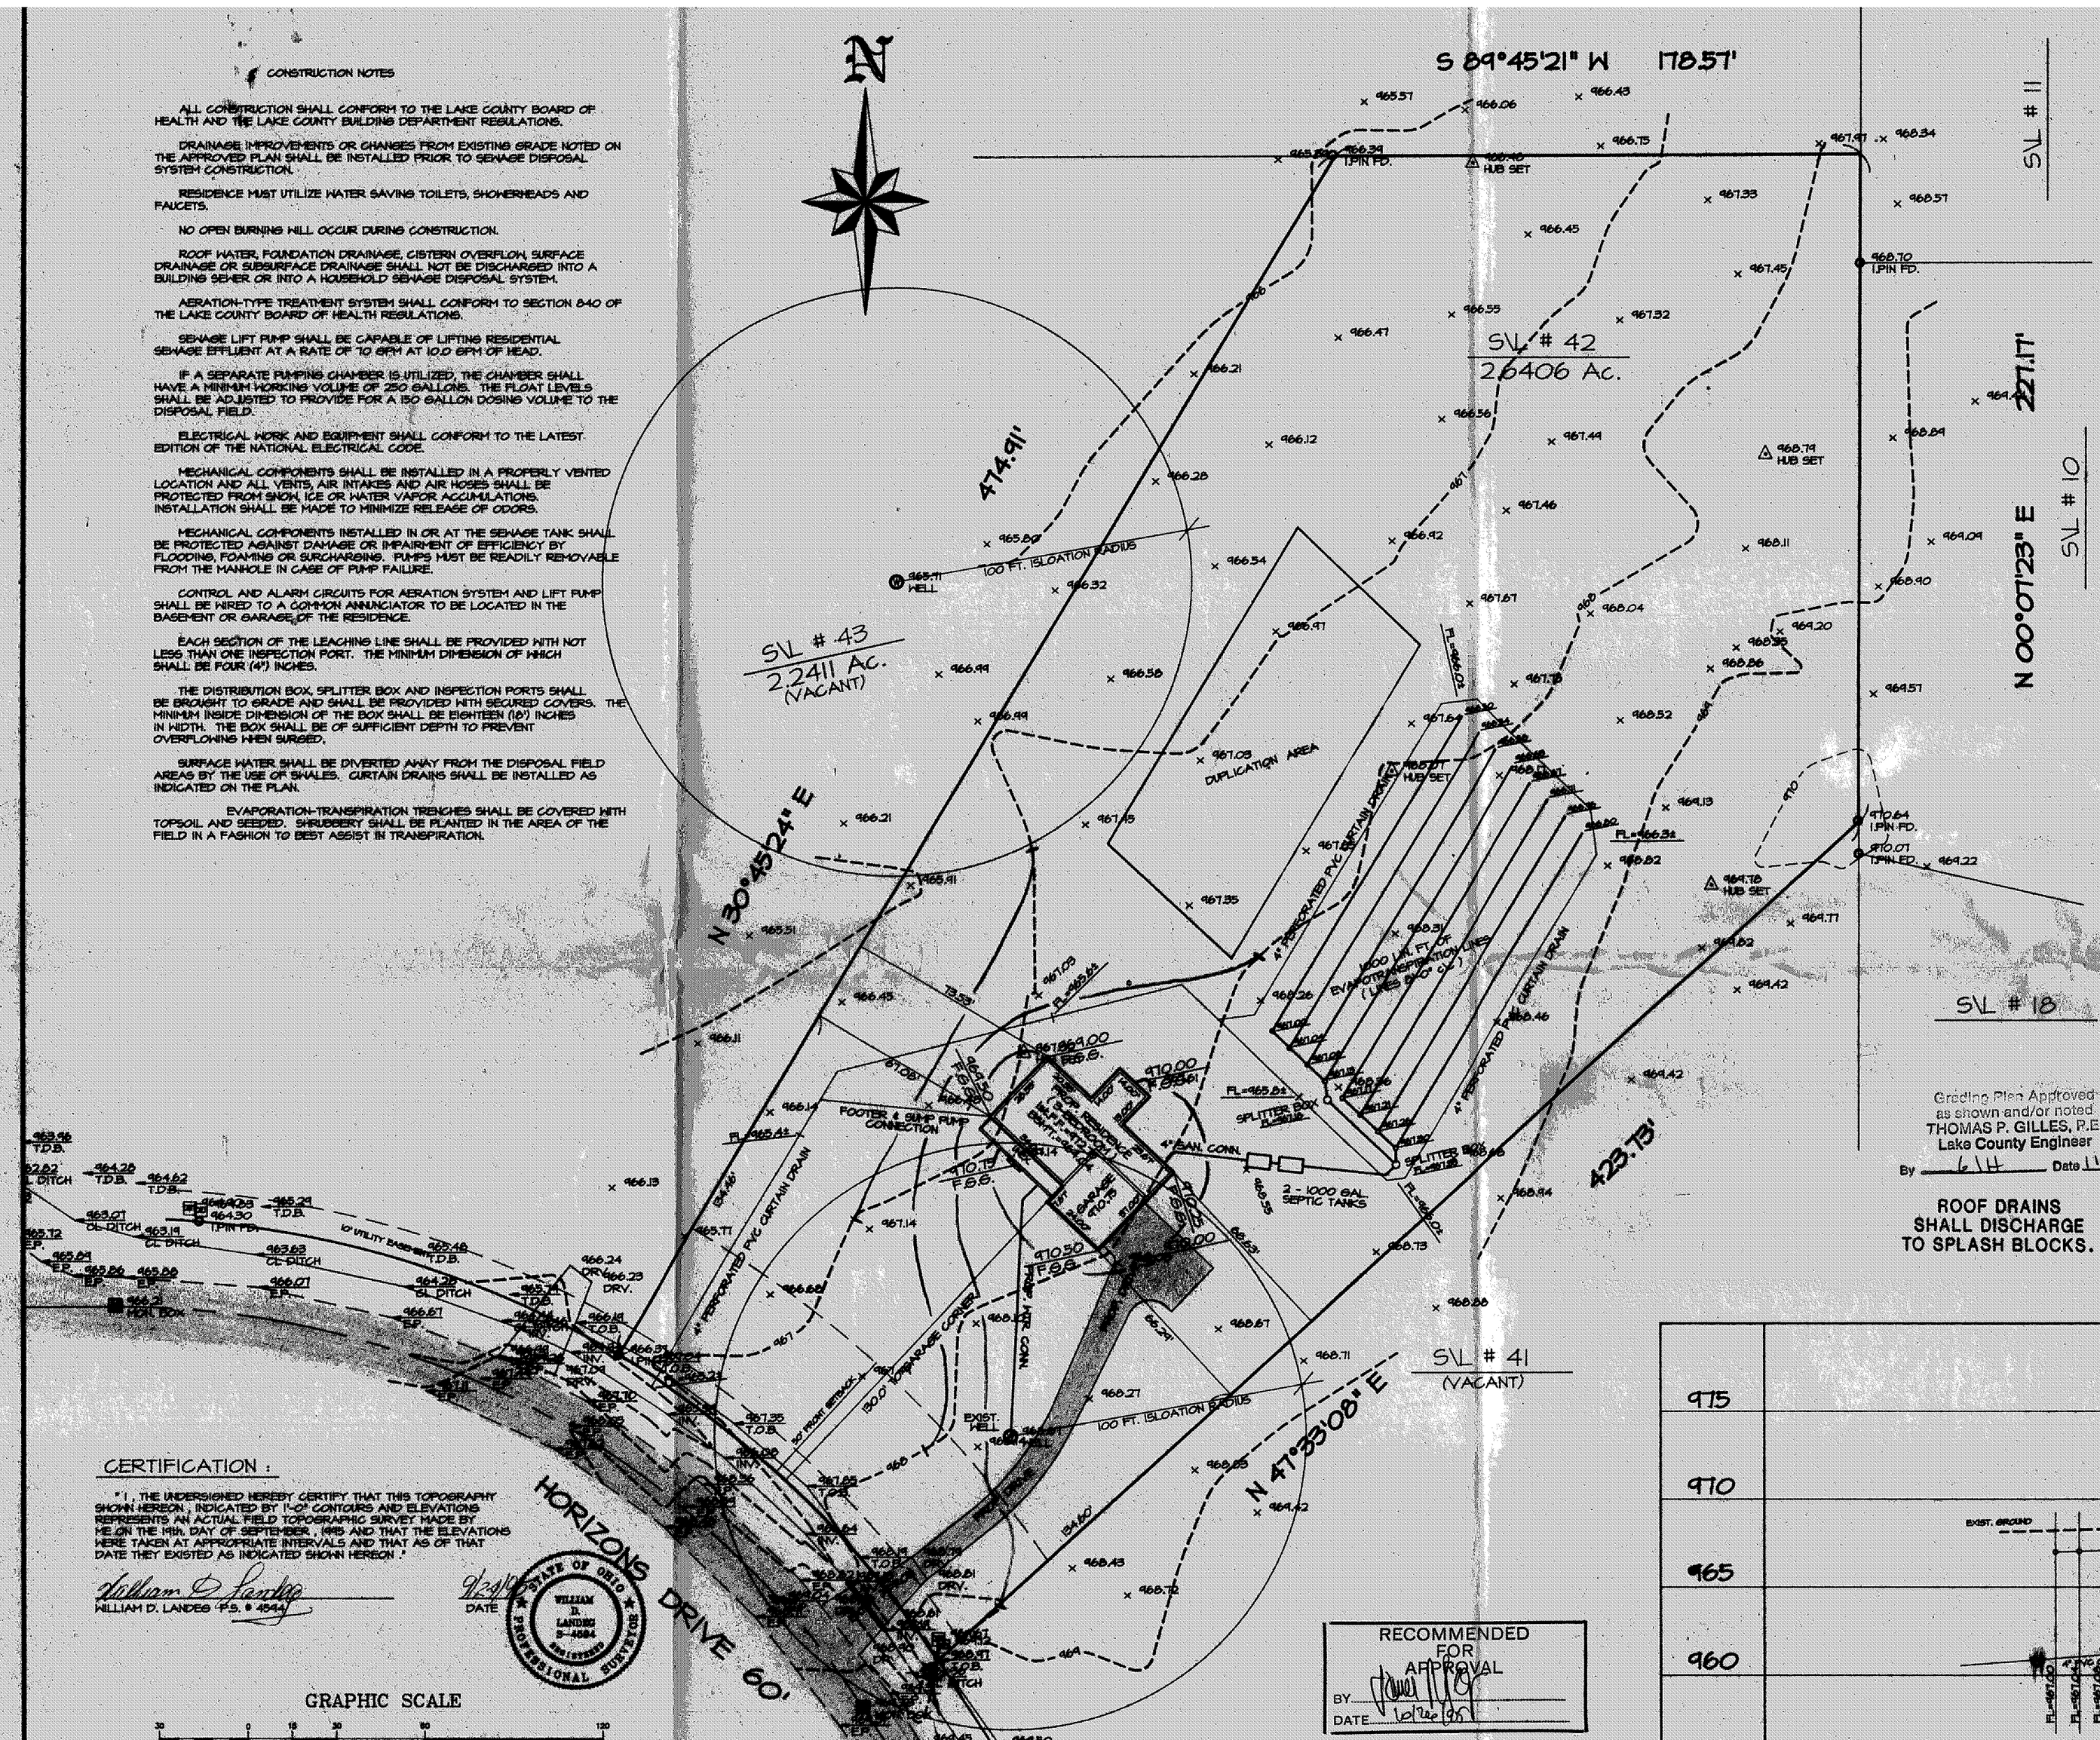
N
S 89°45'21" W 178.57'
SVL # 11
SVL # 42
2.6406 Ac.
SVL # 10
N 00°07'23" E 227.17'
474.91'
100 FT. ISOLATION RADIUS
SVL # 43
2.2411 Ac.
(VACANT)
DUPLICATION AREA
N 30°45'24" E
4" PERFORATED PVC CURTAIN DRAIN
1000 LIN. FT. OF EVAPOTRANSPIRATION LINES (LINES 2'-0" O.C.)
FOOTER & SUMP PUMP CONNECTION
2 - 1000 GAL. SEPTIC TANKS
SPLITTER BOX
423.73'
SVL # 41
(VACANT)
N 47°33'08" E
HORIZONS DRIVE 60'
WELL
EXIST. WELL
1 PIN FD.
HUB SET
1 PIN SET
FL=466.84
FL=465.84
FL=465.54
FL=465.01
FL=466.02
FL=466.34
FL=466.13
FL=466.46
FL=466.42
FL=466.26
FL=466.31
FL=466.51
FL=466.60
FL=466.82
FL=466.52
FL=466.36
FL=466.20
FL=466.09
FL=465.90
FL=465.84
FL=465.79
FL=465.74
FL=465.69
FL=465.64
FL=465.59
FL=465.54
FL=465.49
FL=465.44
FL=465.39
FL=465.34
FL=465.29
FL=465.24
FL=465.19
FL=465.14
FL=465.09
FL=465.04
FL=464.99
FL=464.94
FL=464.89
FL=464.84
FL=464.79
FL=464.74
FL=464.69
FL=464.64
FL=464.59
FL=464.54
FL=464.49
FL=464.44
FL=464.39
FL=464.34
FL=464.29
FL=464.24
FL=464.19
FL=464.14
FL=464.09
FL=464.04
FL=463.99
FL=463.94
FL=463.89