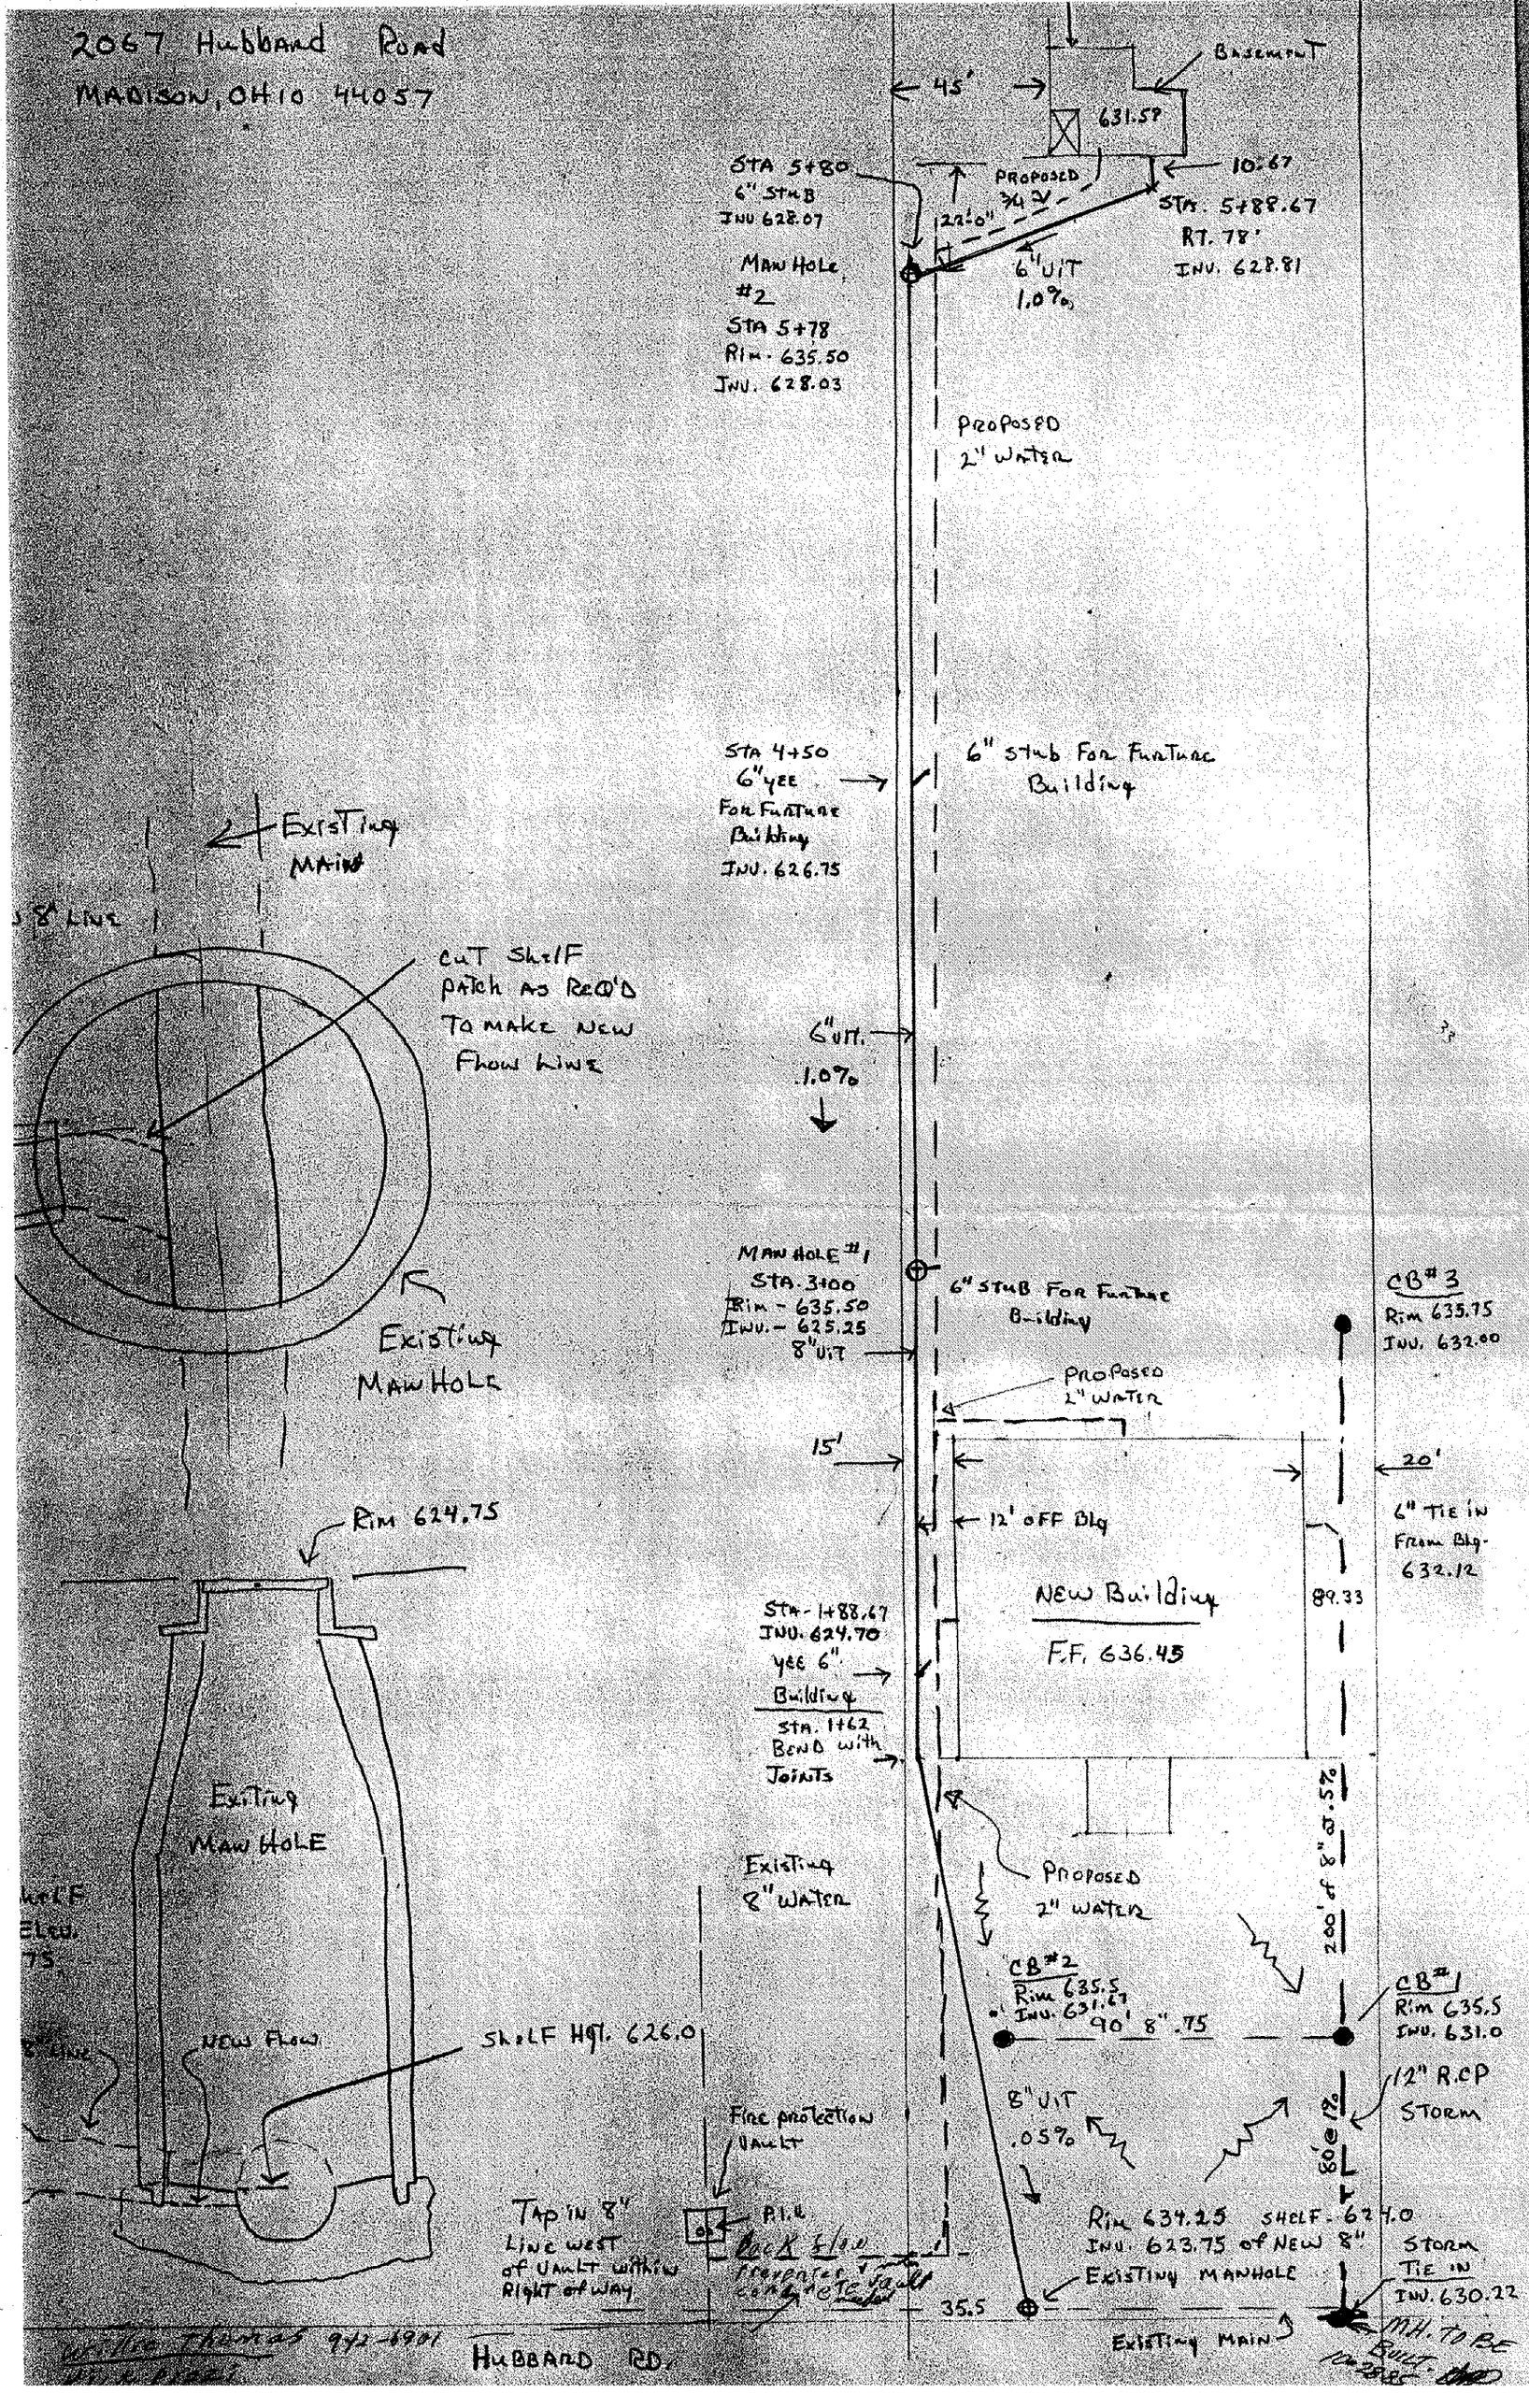
2067 Hubbard Road
MADISON, OHIO 44057
45'
Basement
631.59
STA 5+80
6" STUB
INV 628.07
PROPOSED
3/4 V
22'-0"
10.67
STA. 5+88.67
RT. 78'
INV. 628.81
6" VIT
1.0%
MAN HOLE
#2
STA 5+78
Rim - 635.50
INV. 628.03
PROPOSED
2" WATER
STA 4+50
6" YEE
For Furture
Building
INV. 626.75
6" stub For Furture
Building
Existing
MAIN
8" LINE
CUT SHELF
PATCH AS REQ'D
TO MAKE NEW
FLOW LINE
6" VIT.
1.0%
MAN HOLE #1
STA. 3+00
Rim - 635.50
INV. - 625.25
8" VIT
6" STUB For Furture
Building
CB#3
Rim 635.75
INV. 632.00
Existing
MAN HOLE
PROPOSED
2" WATER
15'
20'
12' OFF Blg
6" TIE IN
From Blg.
632.12
Rim 624.75
NEW Building
F.F. 636.45
89.33
STA - 1+88.67
INV. 624.70
YEE 6"
Building
STA. 1+62
BEND with
JOINTS
Existing
MAN HOLE
200' of 8" @ .5%
Existing
8" WATER
PROPOSED
2" WATER
CB#2
Rim 635.5
INV. 631.67
90' 8" .75
CB#1
Rim 635.5
INV. 631.0
SHELF
ELEV.
75
8" LINE
NEW FLOW
SHELF HGT. 626.0
12" R.C.P
STORM
8" VIT
.05%
80' @ 1%
Fire protection
VAULT
Tap in 8"
Line west
of VAULT within
Right of way
P.I.U
Rim 634.25
INV. 623.75
SHELF - 624.0
of NEW 8"
Existing MANHOLE
STORM
TIE IN
INV. 630.22
35.5
Existing MAIN
M.H. TO BE
BUILT
HUBBARD RD.
Willie Thomas 942-6901