10:18:27

4/20/2006

3)\04008.dwg,

D:\Acad\dwg\04008(terrace

Construction Entrance Detail

Silt Fence Detail

Flot Slope in Front of Borier

PLAN VIEW

PROFILE

Road or Other Existing Poved Surface

- 1. BENCHMARK EX. HYDRANT, TOP OF FLANGE ELEVATION = 629.48 IN FRONT OF S/L 42
- 2. SIDEWALK TO BE 4' WIDE, 4" THICK AND 6" THICK AT DRIVES.
- 3. DRIVEWAY APRON TO BE 6" THICK CONCRETE.
- BLOCKS.
- 5. CONTRACTOR RESPONSIBLE FOR CONTACTING THE OHIO UTILITY PROTECTION SERVICE 1 (800) 362-2764 AND ALL UTILITY COMPANIES A MINIMUM OF 48 HOURS PRIOR
- 6. THE LOCATION BOTH HORIZONTAL AND VERTICAL OF EXISTING UNDERGROUND UTILITIES SHOWN HEREON, HAVE BEEN OBTAINED BY A DILIGENT AND COMPREHENSIVE SEARCH OF AVAILABLE RECORDS. VERIFICATION BY FIELD OBSERVATION HAS BEEN CONDUCTED WHERE PRACTICAL HOWEVER, OXBOW ENGINEERING, INC. DOES NOT GUARANTEE THE COMPLETENESS, NOR ACCURACY THEREOF.
- INVERTS IN THE FIELD PRIOR TO FOUNDATION EXCAVATION.
- 8. EROSION AND SEDIMENT-CONTROL PRACTICES TO BE INSTALLED AS DESCRIBED IN THE RAIN WATER LAND DEVELOPMENT MANUAL AS DIRECTED BY THE LAKE COUNTY SOIL AND WATER CONSERVATION DISTRICT.
- 9. DISTURBED AREAS OF THE SITE THAT ARE TO REMAIN IDLE FOR MORE THAN THIRTY (30) DAYS SHALL BE PROPERLY SEEDED AND STRAW MULCHED WITHIN SEVEN (7) DAYS OF COMPLETION OF INITIAL GRADING. TEMPORARY SEEDING AND MULCHING OF A THIRTY (30) FOOT STRIP OF THE ENTIRE FRONT OF THE LOT SHALL BE MAINTAINED ON THE SITE ONCE INITIAL GRADING IS COMPLETE.
- BALE PER EVERY TEN (10) FEET OF CURB, AT A WIDTH OF THIRTY (30) FEET OF THE ENTIRE LENGTH OF THE LOT.


Stormwater Management Plan Approved as shown and/or noted JAMES R. GILLS, P.E.


Painesville Township Zoning Department

County Drainage Engineer

Date 5/12/06

APPROVED

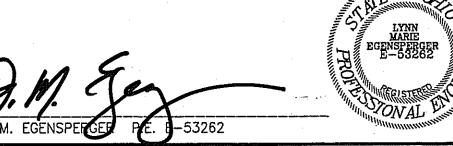



GENERAL NOTES:

- 4. ALL DOWN SPOUTS TO BE OUTLETTED TO SPLASH
- TO CONSTRUCTION.

- 7. CONTRACTOR SHALL VERIFY ELEVATIONS OF LATERAL

- 10. STRAW-MULCH SHALL BE APPLIED AT A RATE OF