

### Erosion and Sediment Control Schedule

**Ingress-Egress**  
A stone access drive complete with under lying geo-textile fabric (20 feet wide and 50 feet long) for ingress and egress at the site shall be installed. This drive shall be the only entrance and exit to the site.

**Silt Fence**  
All silt fence shall be installed prior to any earthwork activities at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

**Temporary Seeding**  
Disturbed areas of the site that are to remain idle for more than thirty (30) days shall be properly seeded and straw mulched within seven (7) days of completion of initial grading. Temporary seeding and mulching of a thirty (30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.

**Stabilization of critical areas** within fifty (50) feet of any stream or wetland shall be complete within two (2) days of the disturbance if the site is to remain inactive for longer than fourteen (14) days.

**Mulching**  
Straw-mulch shall be applied at a rate of 1 bale per every ten (10) feet of curb, at a width of thirty (30) feet of the entire length of the lot. Wood chips may also be used but must be spread at a minimum depth of four inches over the thirty-foot width and must be accompanied by a properly installed silt fence.


**Maintenance**  
Erosion and sediment controls shall be inspected every seven (7) days or within 24 hours of a 0.5\"/>

### Temporary Seeding Specifications

Seeding Date	Species	Lb./1,000 Ft. <sup>2</sup>	Per Ac.
March 1 to August 15	Corn	3	4 bushel
	Tall Fescue	1	40 lb.
	Annual Ryegrass	1	40 lb.
	Perennial Ryegrass	1	40 lb.
August 15 to November 1	Rye	3	2 bushel
	Tall Fescue	1	40 lb.
	Annual Ryegrass	1	40 lb.
	Perennial Ryegrass	1	40 lb.
November 1 to Spring Seeding	Wheat	3	2 bushel
	Tall Fescue	1	40 lb.
	Annual Ryegrass	1	40 lb.
	Perennial Ryegrass	1	40 lb.

Note: Other species and species mix to be submitted.

NOTES : 1. The Contractor Shall Verify the Following Before Starting:  
Finish Floor Elevations and House Size,  
Location and elevation of existing utility connections.  
2. Contractor Shall Contact OUPS at least 2 Working Days prior to construction, 1-800-362-2764.

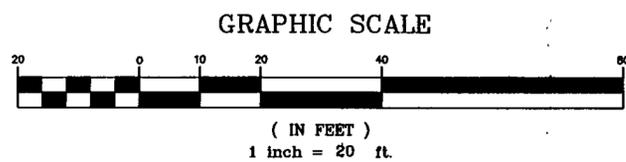

"I, the undersigned hereby certify that this topography, indicated by 1' contours and elevations shown hereon represents an actual field survey made by me in Feb., 2004, and that the elevations were taken at appropriate intervals and that as of that date they existed as indicated hereon."

*David A. Rapp* 2/13/04  
David A. Rapp Reg. No. (428-1238)  
P.O. BOX 582, MADISON, OHIO 44057

Subject to approval by:  
 Zoning Department  
 LC General Health District  
 LC Soil & Water Conservation District  
 LC Building Department (final approval)

Stormwater Management Plan  
Approved as shown and/or noted  
JAMES R. GILLS, P.E.  
County Drainage Engineer  
By L.S. Date 2/13/04

ROOF DRAINS SHALL DISCHARGE TO SPLASH BLOCKS. UNLESS DISCHARGE FLOWS INTO DETENTION POND WITH WATER QUALITY FEATURES

CHUCK HUGHES  
SILVERWOOD SUBDIVISION  
Site Plan For Sublot 7

**Lake County Soil & Water Conservation District**  
125 East Erie Street Phone: (440) 350-2730  
Painesville, Ohio 44077 Fax: (440) 350-2601  
[www.lakecountyohio.org/soil](http://www.lakecountyohio.org/soil)