




GRAPHIC SCALE

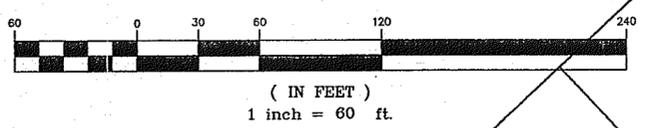

CONSTRUCTION ENTRANCE DETAIL

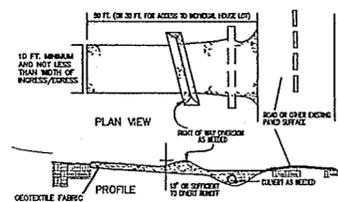

SILT FENCE DETAIL

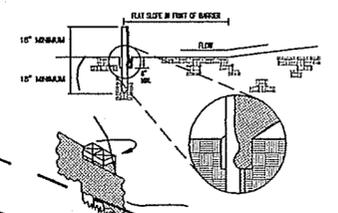

TEMPORARY SEEDING SPECIFICATIONS

SEEDING DATES	SPECIES	LB./1,000 FT ²	PER ACRE
MARCH 1 TO AUGUST 15	GRASS	3	1 BURL
	TALL FESCUE	1	40 LB.
	ANNUAL PEGLEG	1	40 LB.
AUGUST 16 TO NOVEMBER 1	RYE	3	1 BURL
	TALL FESCUE	1	40 LB.
	ANNUAL PEGLEG	1	40 LB.
NOVEMBER 2 TO SPRING SEEDING	RYE	3	1 BURL
	TALL FESCUE	1	40 LB.
	ANNUAL PEGLEG	1	40 LB.

NOTE: OTHER APPROVED SEED SPECIES MAY BE SUBSTITUTED

EROSION AND SEDIMENT CONTROL SCHEDULE

INGRESS-EGRESS
A STONE ACCESS DRIVE COMPLETE WITH UNDERLYING GEO-TEXTILE FABRIC (20 FEET WIDE AND 50 FEET LONG) FOR INGRESS AND EGRESS AT THE SITE SHALL BE INSTALLED. THIS DRIVE SHALL BE THE ONLY ENTRANCE AND EXIT TO THE SITE.

SILT FENCE
ALL SILT FENCE SHALL BE INSTALLED PRIOR TO ANY EARTHWORK ACTIVITIES AT THE SITE IN THE LOCATIONS SHOWN ON THE SITE PLAN AS WELL AS ALONG THE FRONT OF ANY LOT THAT SLOPES TOWARD THE STREET.

TEMPORARY SEEDING
DISTURBED AREAS OF THE SITE THAT ARE TO REMAIN IDLE FOR MORE THAN TWENTY-ONE(21) DAYS SHALL BE PROPERLY SEEDDED AND STRAW MULCHED WITHIN SEVEN(7) DAYS OF COMPLETION OF THE INITIAL GRADING. TEMPORARY SEEDING AND MULCHING OF A THIRTY (30) FOOT STRIP OF THE ENTIRE FRONT OF THE LOT SHALL BE MAINTAINED ON THE SITE ONCE INITIAL GRADING IS COMPLETE.

STABILIZATION OF CRITICAL AREAS WITHIN FIFTY(50) FEET OF ANY STREAM OR WETLAND SHALL BE COMPLETE WITHIN TWO(2) DAYS OF THE DISTURBANCE IF THE SITE IS TO REMAIN INACTIVE FOR LONGER THAN FOURTEEN(14) DAYS.


MULCHING
STRAW-MULCH SHALL BE APPLIED AT A RATE OF 1 BALE PER EVERY TEN(10) FEET OF CURB, AT A WIDTH OF THIRTY(30) FEET THE ENTIRE LENGTH OF THE LOT. WOOD CHIPS MAY ALSO BE USED BUT MUST BE SPREAD AT A MINIMUM DEPTH OF FOUR INCHES OVER THE THIRTY-FOOT WIDTH AND MUST BE ACCOMPANIED BY A PROPERLY INSTALLED SILT FENCE.

MAINTENANCE
EROSION AND SEDIMENT CONTROLS SHALL BE INSPECTED EVERY SEVEN(7) DAYS OR WITHIN 24 HOURS OF A 0.5" OR GREATER RAINFALL EVENT. NECESSARY REPAIRS SHALL BE MADE AT THIS TIME.

SILT FENCE INLET PROTECTION
SILT FENCE INLET PROTECTION SHALL BE INSTALLED ON ALL STORM SEWER CATCH BASINS AND REMAIN IN PLACE UNTIL PARKING LOT IS STONED AND PREPPED FOR PAVEMENT.

CEMENT WASHOUT
CEMENT WASH WATER SHALL NOT BE DISCHARGED OFF SITE. ALL WASH WATER SHALL BE COLLECTED IN AN APPROVED, DESIGNATED LOCATION.

EROSION CONTROL
EROSION CONTROL WORK SHALL CONSIST OF TEMPORARY CONTROL MEASURES AS DETAILED ON THE PLANS OR ORDERED BY THE LAKE COUNTY SOIL & WATER CONSERVATION DISTRICT TO CONTROL EROSION THROUGH THE USE OF SILT FENCING, TEMPORARY SEEDING AND STRAW MULCHING AND OTHER EROSION CONTROL MEASURES. ADDITIONAL EROSION AND SEDIMENT CONTROLS MAY BE MANDATED BY THE LAKE SWCD.

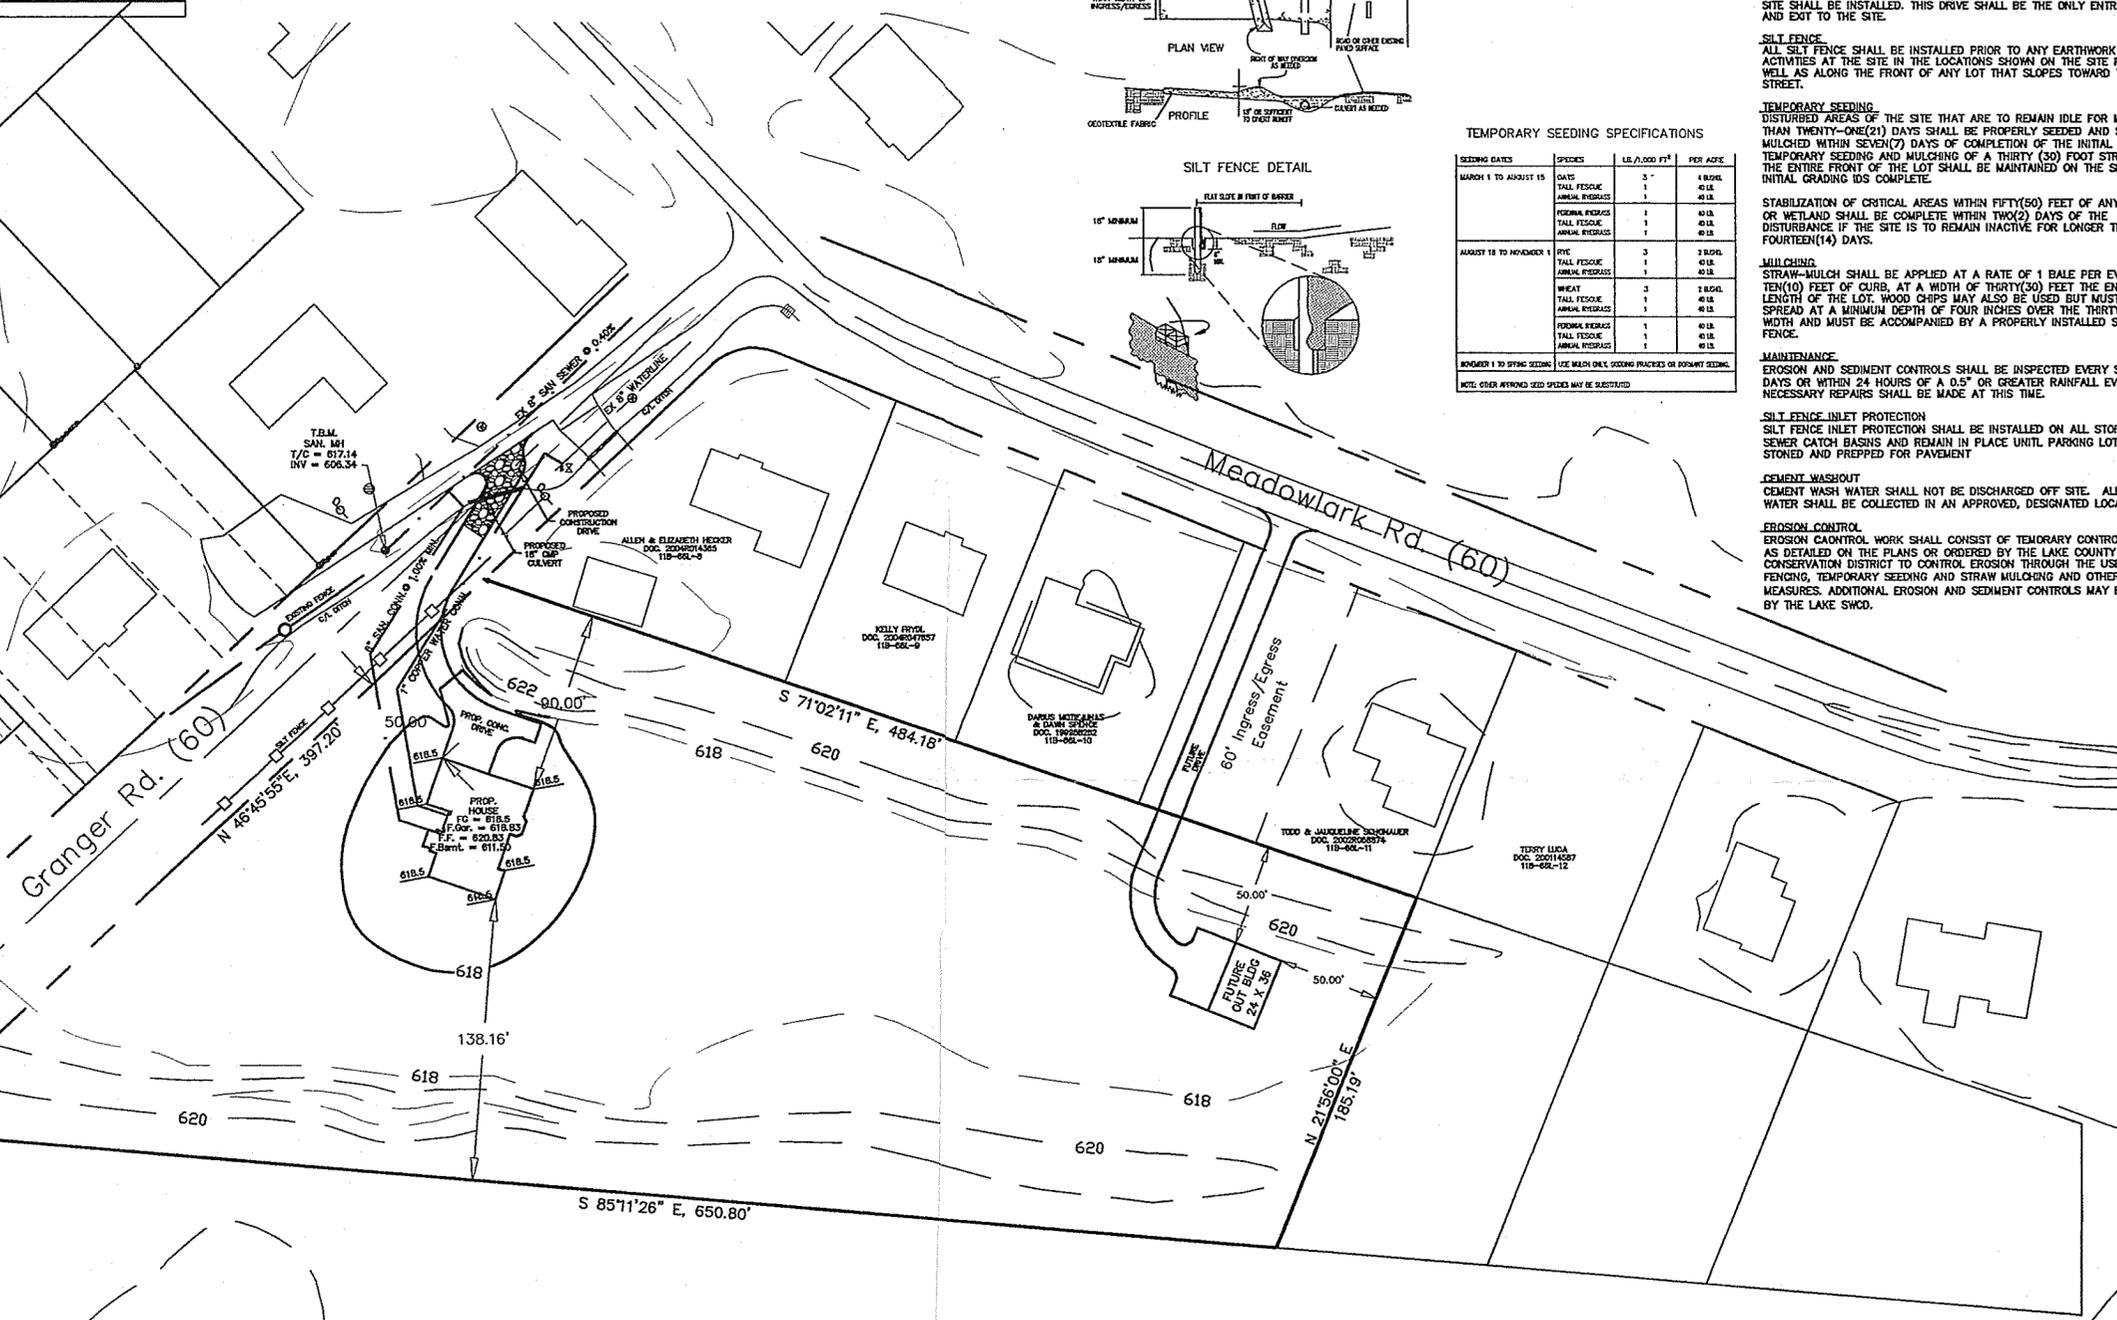

APPROVED
Painesville Township
Zoning Department
2006.07.19
7/19/06



19 July 06

Stormwater Management Plan
Approved as shown and/or noted
JAMES R. GILLS, P.E.
County Drainage Engineer
By *J.S.* Date 7/25/06

TITLE		REVISIONS	
SITE PLAN		DATE	Added Bsmt
PPN 11B-66-56		7-19-06	
Painesville Twp. - Lake County - Ohio			
DATE	CHECKED BY	SCALE	
6-05-06	DJG	1" = 60'	
DRAWN BY			
DJG			
SHEET NO.		1 OF 1	
DWG. NO.			

WILLIAM R. GRAY ASSOCIATES, INC.
7519 MENTOR AVE. MENTOR, OHIO 44060
(440) 946-1616