CENTERLINE CURVE DATA

CURVE	RADIUS	LENGTH	TANGENT	CHORD	BEARING	DELTA
CL1	300.00'	81.16'	40.83'	80.91'	S82°17'05"E	15°30'00"
CL2	400.00'	298.37'	156.51'	291.50'	N84°05'46"E	42°44'17"
CL3	400.00'	64.69'	32.41'	64.62'	S79°10'03"E	09°15'56"
CL4	400.00'	37.65'	18.84'	37.64'	S86°29'50"E	05°23'37"
CL5	400.00'	2317.25'	100.02'	194.07'	N76°46'00"E	331°55'16"

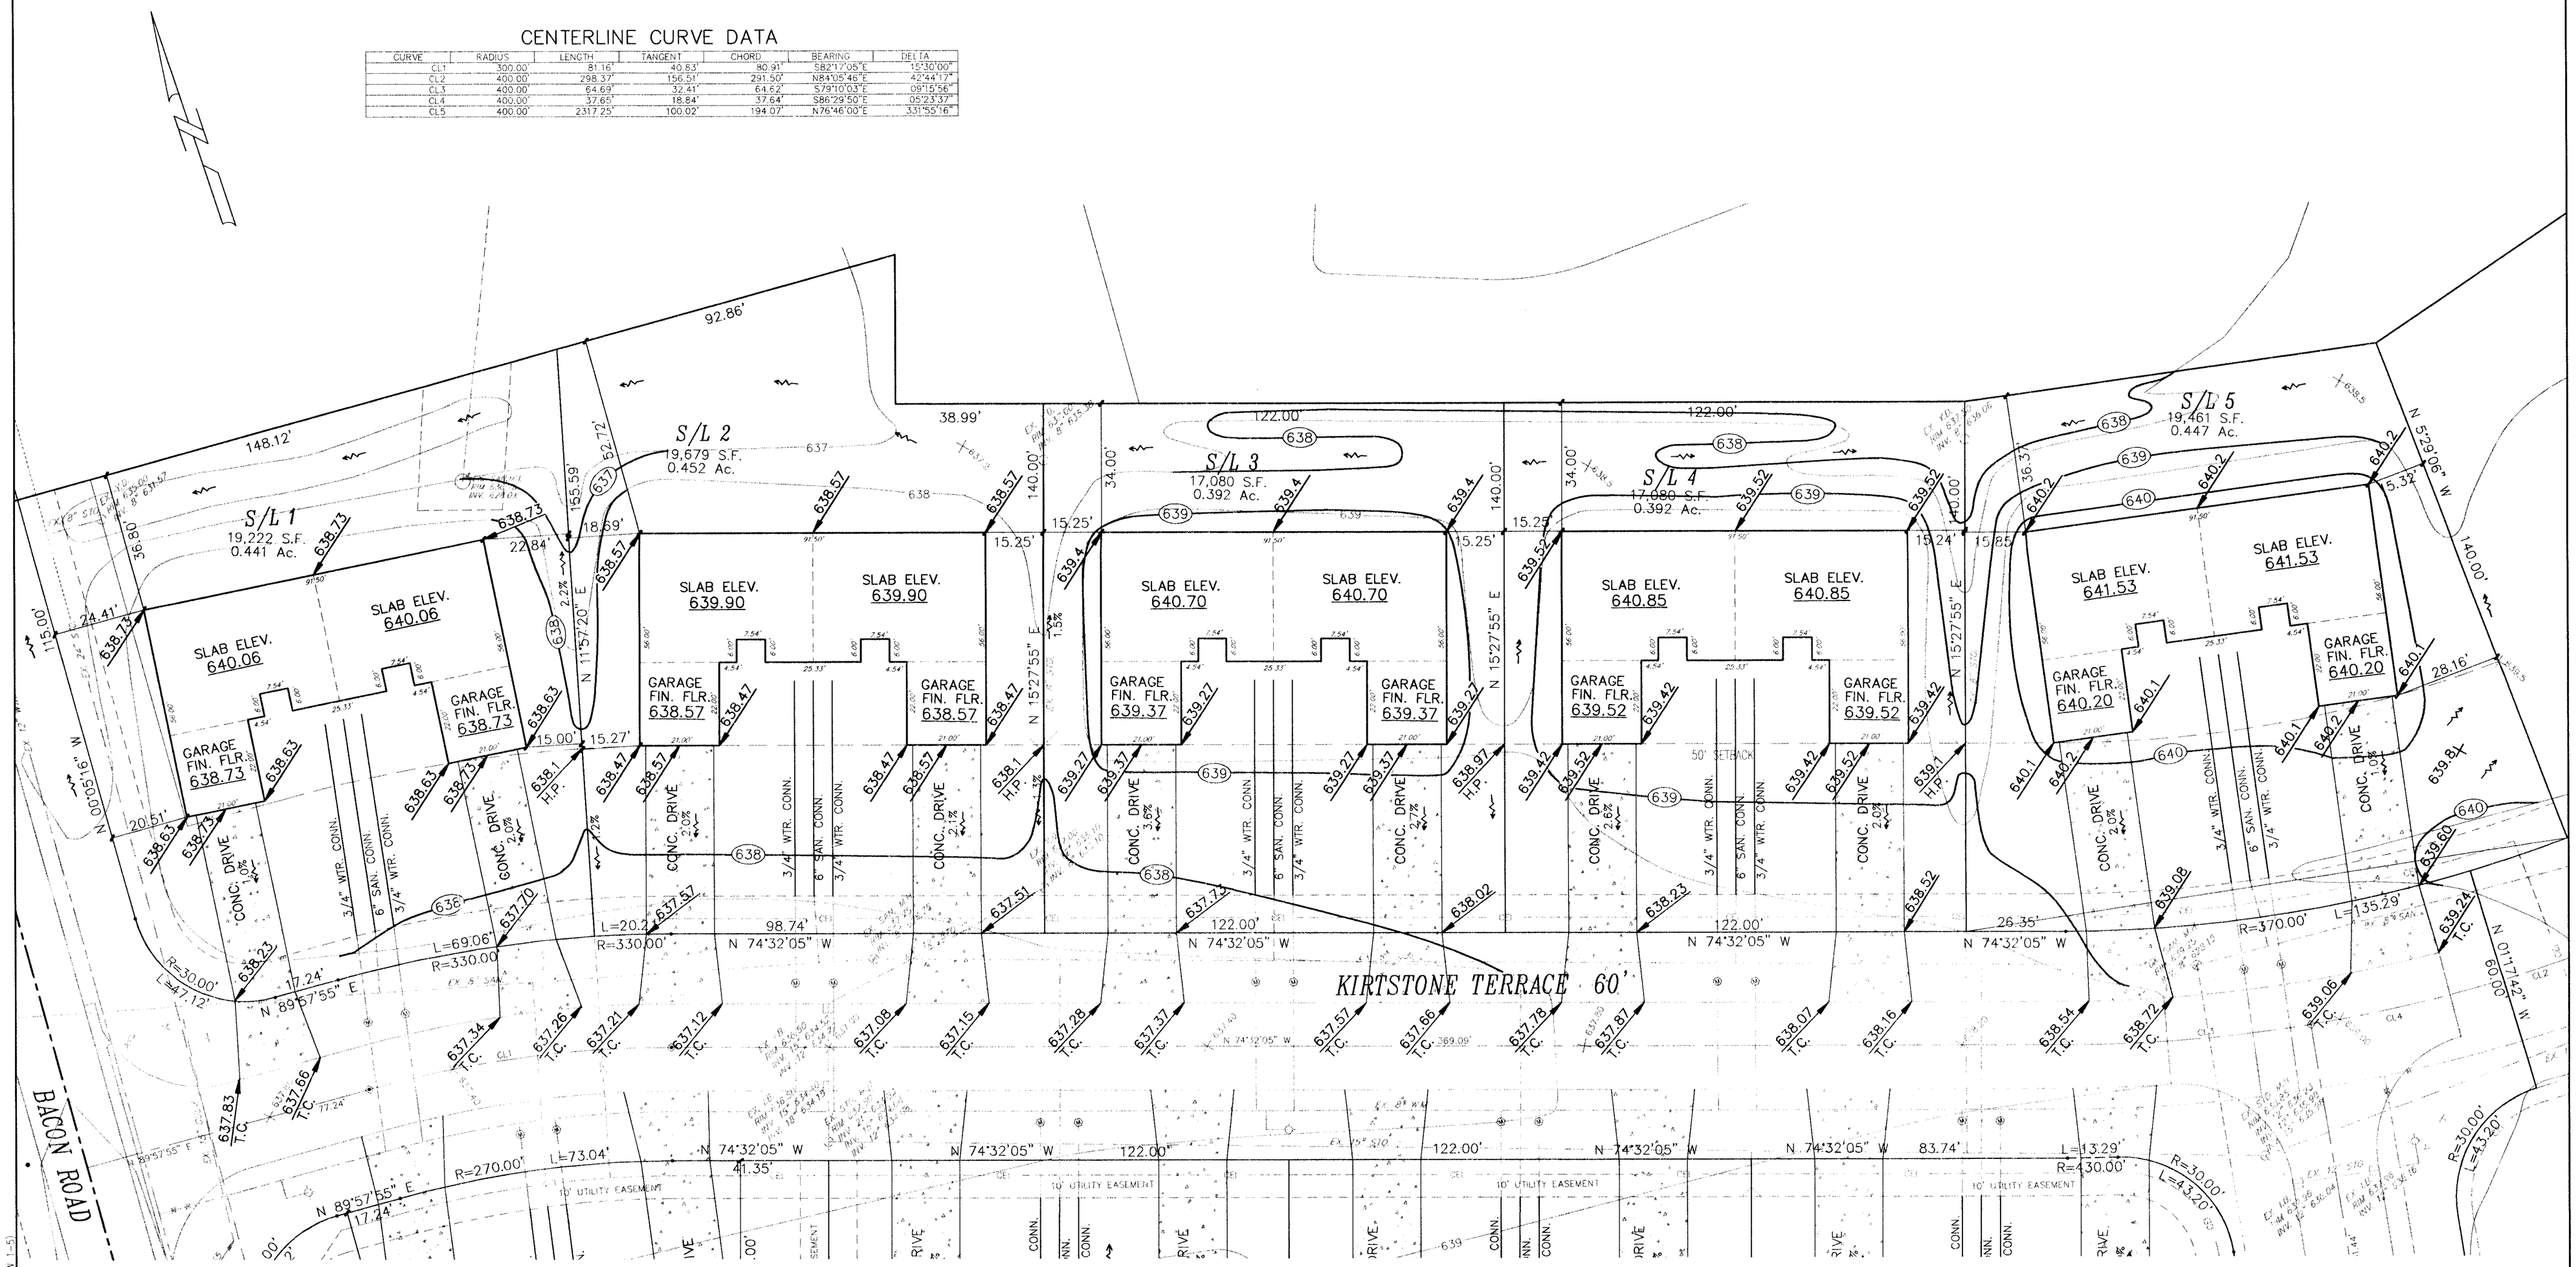

Grading Plan Approved as shown and/or noted
THOMAS P. GILLES, P.E.
Lake County Engineer
By GJH Date 5.1.97
Sublot 2 only

APPROVED
PAINESVILLE TOWNSHIP
ZONING DEPARTMENT
4/29/97

PRINTED
APR 25 1997
CT CONSULTANTS, INC.

BENCHMARK:
TOP OF HYDRANT – EAST SIDE OF BACON ROAD ACROSS FROM HOUSE #789, ELEVATION 643.46

LEGEND

639.8	EXISTING GRADE
639.80	PROPOSED GRADE
637	EXISTING CONTOUR
637	PROPOSED CONTOUR

CERTIFICATION

I HEREBY CERTIFY THAT THIS PLAT WAS PREPARED BY ME AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

STATE OF OHIO
MICHAEL W. COLPETZER
7200

SITE PLAN for 5/12
EDWARD H. TRESGER, INC.

BEING S/L NO. 1 THRU 5 IN THE PINES SUBDIVISION PHASE IV
IN PAINESVILLE TOWNSHIP, OHIO

DATE: APRIL, 1997
DRAWN BY: B.R.S.

CT Consultants, Inc.

SCALES
HOR. 1=20
VERT.
CONTRACT No.

CT CONSULTANTS, INC. DATE: 04/24/97 16:55 H:\CTA\94200\SPA\94200-PWI (VIEW 1-5)